



caoil



CA Oil: industrial vacuum cleaners for oil, lubricants and swarf

The CA Oil vacuum cleaners range have been designed to vacuum oil and lubricants and swarf and coolants mixtures. These vacuums are essential for all metal lathing and machining operations, as well as numerical controls centres (CNC).

CA Oil vacuums are able to separate shavings from oil and lubricants, so they can be recycled and reused. In addition, they have great structural resistance against exposure to corrosive oils and abrasive particles.

CA Oil vacuum cleaners are particularly recommended for environments in the industrial, automotive, logistics, transport and artisan sectors.

THE ADVANTAGES OF CA OIL

- Frame and structure made entirely of steel for resistance to abrasion and stress.
- The special coaxial turbine with induction motor configuration offers great durability.
- The components and structure can stand up to corrosion caused by oil and industrial lubricants.
- Polyester cylindrical filter as standard for CA Oil 2 L.
- Nylon chip separator filter as standard for CA Oil 40 XL.




CA Oil 2 L
Tank capacity: 100 l
Type: industrial WET & DRY
Suction: motor



CA Oil 40 XL
Tank capacity: 120 l
Type: industrial WET & DRY
Suction: turbine

Details that matter

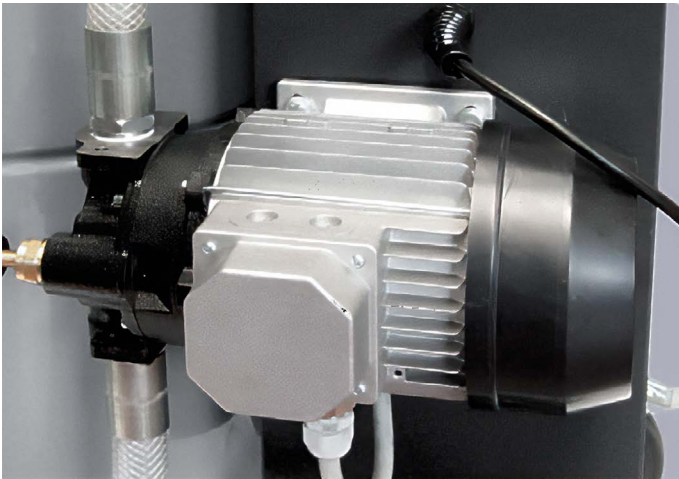

EVACUATION PUMP

The evacuation pump of the CA Oil 40 XL vacuum cleaner empties the fluid content of the tank in the desired container to be recycled and reused.

SWARF SEPARATOR

The swarf separator of the CA Oil 2 L separates the solid components from the liquid, so that they can be sent directly to disposal or recycling.



FLOAT















The CA Oil 2 L mechanical float device blocks the suction when the liquid in the tank reaches the maximum level. The CA Oil 40 XL is equipped with an electronic floater.

DRAIN HOSE

The drain hose facilitates emptying operations.



Available kits and accessories for CA OIL

	Antistatic kit Ø40 mm CA Oil 2 L ◇		Antistatic kit Ø50 mm CA Oil 2 L ◇ CA Oil 40 XL ◇		Hose: Oregon - polyurethane, antistatic, oilproof Ø40 mm CA Oil 2 L ◇ CA Oil 40 XL ◇
	Hose: Oregon - polyurethane, antistatic, oilproof Ø50 mm CA Oil 2 L ◇ CA Oil 40 XL ◇		Hose: Evaflex - polyurethane, antistatic, oilproof Ø50 mm CA Oil 2 L ◇ CA Oil 40 XL ◇		Hose: Steel Ø40 mm CA Oil 2 L ◇
	Hose: Steel Ø50 mm CA Oil 2 L ◇ CA Oil 40 XL ◇		Cylindrical filter - polyester CA Oil 2 L •		Pre-filter nylon with non-stick surface CA Oil 2 L ◇
	Pre-filter - polycarbonate with non-stick surface CA Oil 40 XL ◇		Shaving separator filter - nylon CA Oil 40 XL •		Reductor 70 > 50 steel CA Oil 2 L •
	Reductor 70 > 50 inox steel CA Oil 2 L ◇		Shaving separator basket kit CA Oil 2 L •		

Legend

• standard ◇ optional

TECHNICAL DESCRIPTION		CA Oil 2 L	CA Oil 40 XL
Voltage-frequency	V-fase-Hz	230-1-50/60*	400-3-50*
Power	W-Hp	2400	3000-4
Motor	n./type	2/double stage bypass	Coaxial induction
Water lift	mm H ₂ O	2500	3200
Airflow	l/s	430	350
Tank capacity	l	100	120
Type of collection	-	Tank + Chip separator	Tank + Chip separator
Noise level	dB	71	71
Dimensions (LxHxW)	mm	920x1310x660	1240x1680x660
Weight	Kg	89	168
Evacuation pump	W	-	750

*other voltages available on request



Industrial



Handicraft



Automotive



Logistics



Transport



COMAC S.p.A. Via Maestri del Lavoro, 13 - 37059 Santa Maria di Zevio - Verona - ITALY
Tel. 045 8774222 - www.comac.it - com@comac.it

Comac S.p.A. org. cert. ISO 9001:2015, ISO 14001:2015, ISO 45001:2018, SA 8000:2014

